

# **Katon<sup>®</sup>**



**KATON<sup>®</sup> PF586**

**High Performance Perfluoroelastomer**

---

# KATON® FFKM Series PF586

## perfluoroelastomer

**KATON® PF586** is a perfluoroelastomer (FFKM) offering wide operational range and superior compression set resistance, thanks to its unique peroxide curing system that does not need any coagent (TAIC or equivalent) for curing to be carried out. Thanks to its curing system, it can offer a very broad chemical resistance in a wide variety of media including acids, caustics, ketones, aldehydes, esters, ethers, methanol, solvents, sour gases, hydrocarbons, steam, hot water and mixed process streams along with excellent thermal resistance.

**KATON® PF586** is suitable for most applications in temperature ranging from -10 °C to 318 °C.

The primary use for **KATON® PF586** is the manufacturing of any kind of elastomeric sealing element such as O-rings, gaskets, valve bodies, butterfly valves, pump housings and stators, metal bonded parts, diaphragms, profiles, etc. These sealing elements can be used in mechanical seals, pumps, compressors, valves, reactors, mixers, sprayers, dispensers, quick connect couplings, controls, instrumentation, etc. in chemical and petrochemical in-dustry, hydrocarbon processing, petroleum exploration and extraction, food processing, pharmaceutical and bio-analytical industry, aerospace and semiconductor manufacturing industries.

**KATON® PF586** can be combined with other typical fluoroelastomer compounding ingredients; its mixing can be accomplished with two-roll mills or internal mixers. Finished goods may be produced by a variety of rubber processing methods.

**KATON® PF586** is registered in the FDA Inventory of Effective Premarket Notifications for Food Contact Substances. It can be compounded so that the finished gaskets or seals can be used in food processing equipments (see "food processing compounds" section below)



### General

Material Status	• Commercial : Active		
Availability	• Europe	• North America	• Taiwan
Features	• Acid Resistant • High Heat Resistance • Low Compression Set • Fuel Resistant	• Good Chemical Resistance • Solvent Resistant • Steam Resistant • Moisture Resistant	• Alcohol Resistant • Food Contact Acceptable • Fuel Resistant
Uses	• Blending • Compounding • Diaphragms	• Gaskets • Profiles • Pump Parts	• Seals • Valves/Valve Parts
Agency Ratings	• FDA Food Contact, Unspecified Rating		
Appearance	• White		
Forms	• Slab		
Processing Method	• Compounding		
Shore A	• 75		

### Physical

### Typical value unit

### Test method

Mooney Viscosity (ML 1+10,121°C)	35MU	No Standard
Fluorine Content	72%	No Standard
Working Temperature	-10°C~318°C	ASTM D573

Notes

Typical properties: these are not to be construed as specifications.

## Properties

Color	White
Hardness, Shore A	75
Tensile strength, MPa	20.0
Tensile strength, Psi	2900.0
Modulus @ 100%, MPa	190.0
100%Modulus Mpa	985(8.5)
101%Modulus Psi	1230
Temperature R WTRACTION 10% ,°C	-4
Elongation	220%

## Fluid Immersion-Water Bomb

70 hrs @ 200°C	19
VOLUME Change,%	+5.9
ASTM	D2000 SAEJ2000

## Compression Set

70 hrs @ 200°C	
% of Percent of original defiection,	25%
168 hrs @ 200°C	
% of Percent of original defiection,	32%

## Plasma Testing

Oxygen 120 min @ 300W 500 sccm	
Weight Loss, %	0.35
Particles generated, 0.3 - 5 micron (x 10E6/cmE2)	1,700

## Temperature

-10°C to 318°C

**ASTM D1418 Designation: FFKM**  
**ISO 1629 Designation: N/A**  
**M D2000/SAE J200 type, class: JK/HK**



**Do your O-ring have thermal degradation issue ?  
It's because O-ring can't stand working  
enviromnt temperatue.**



**KATON® PF586** series are a kind of highly pure perfluorocarbon elastomer products that highly balance all states.

They can provide chemical gas resistance boosting property through a series of vigorous and active elevated temperature plasma applications, offering a longer seal life.

They have excellent resistance to ozone, ammonia, fluorine and oxygen free radicals and have super-low re-lease and outstanding thermal stability.

## KATON® PF586 features and benefits


Excellent compression set characteristics at all temperatures - maximum life at high temperatures . Temperature capability (+318°C) , superior chemical resistance and physical properties . Isolast features make it an alternative to other perfluoroelastomers providing .

## Examples of KATON® applications

Hydrofluoric Acid/HCl	46°C
Adipic Acid	100°C
Paratoluic Acid	148°C
Monochloroacetic Acid	0°C
Nitric Acid, 43%	48-60°C
Stearic Acid (Octadecandic Acid)	85°C

## TGA analysis

Search result for : PF80180-051107  
Date : Mon Nov.07 15 : 10 : 13 2016 (GMT+08:00)  
Search algorithm : Correlation  
Regions searched : 3999.84-649.93

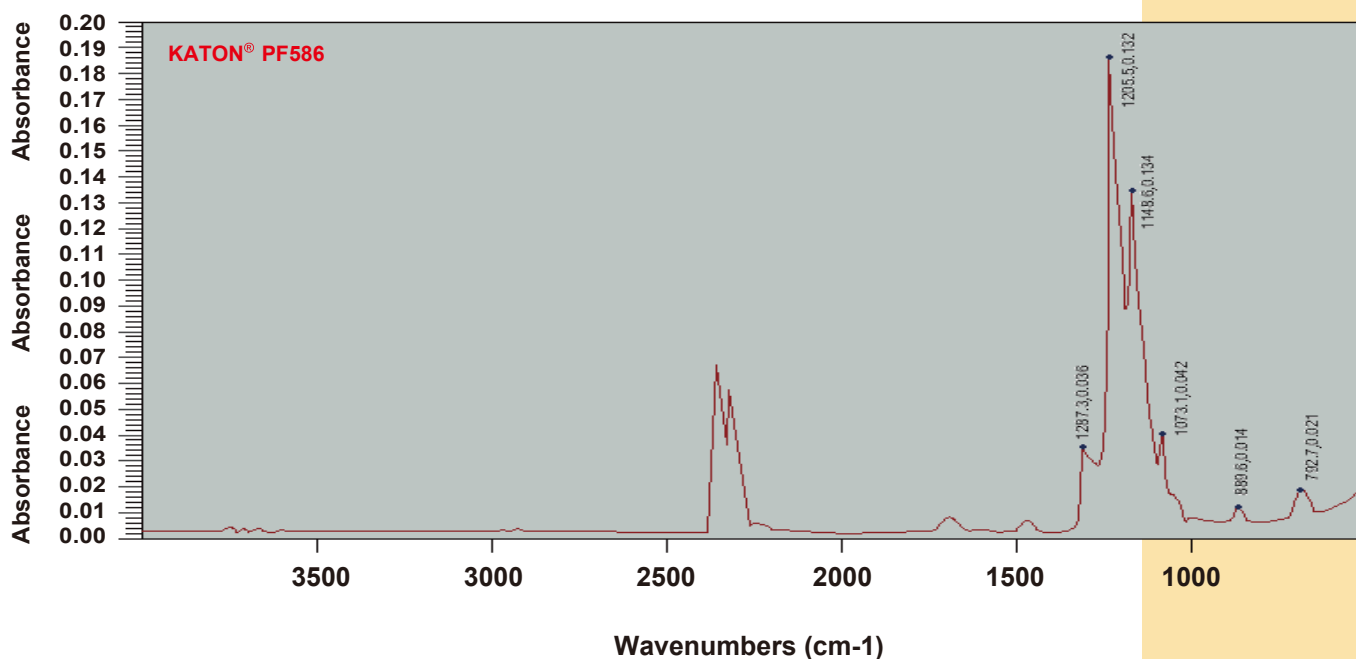

## Acid application laboratory test results (% volume swell)

	Temp	Time	PF587	Kxxx
Hydrochloric Acid, 37amb	-	+0.2	+0.8	-
Hydrofluoric Acid, 60%	40°C	70 h 168 h	+0.6	+0.5
Phosphoric Acid, 85%	120°C	70 h	-0.1	-0.1
Sulfuric Acid, 98%	120°C	70 h	+1.0	+4.1

## PF586 compare with other compound --- Physical properties


	PF586	Cxxx
Hardness (Shore A) Compression Set	75	75
(%)	22 <sup>1</sup>	37 <sup>1</sup>
Modulus @ 100% (MPa)	7.2 <sup>2</sup>	7.2 <sup>3</sup>
Tensile Strength (MPa)	20 <sup>2</sup>	16.9
Elongation at Break (%)	190 <sup>2</sup>	150
Max Operating Temp (°C)	318	315

<sup>1</sup> 70 Hrs @ 200°C (o-rings)

<sup>2</sup> BS903 Part A2

<sup>3</sup> ASTM D412 500 mm/min (20 in/min)


## PF586 compare with other compound --- Compression set @ 70 hours

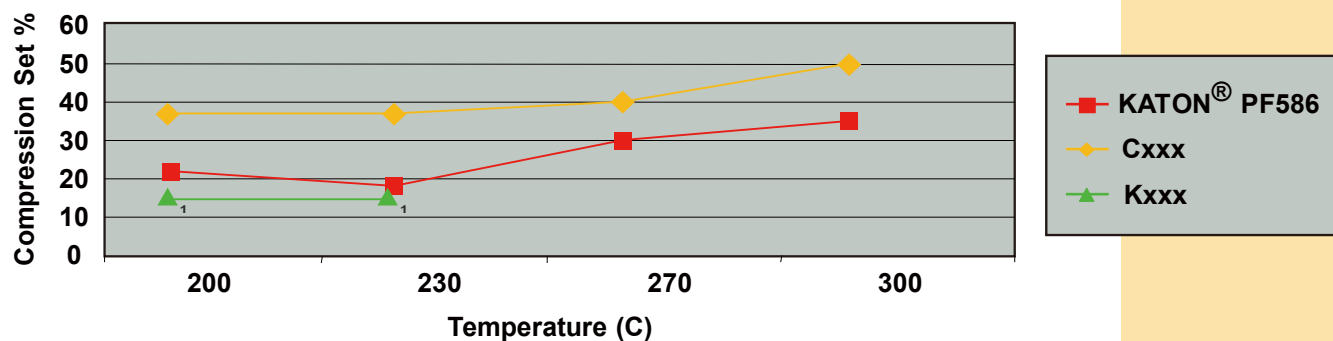

Tests carried out according to ASTM D1414, 25% compression for 70 hours

1 – Comp K FFKM D began to disintegrate at 200°C and above. At 270° and 300°C Comp FFKM D had totally dis-integrated. Compression set readings could not be taken


## PF586 compare with other compound --- Compression set @ 230°C

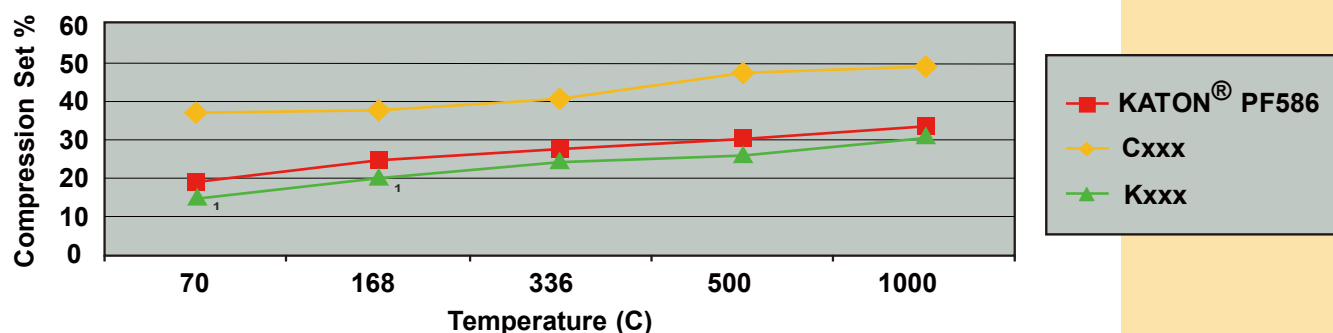

Tests carried out according to ASTM D1414, 25% compression for 70 hours

1 - Comp Matl K began to disintegrate


## PF586 compare with other compound --- Chemical test

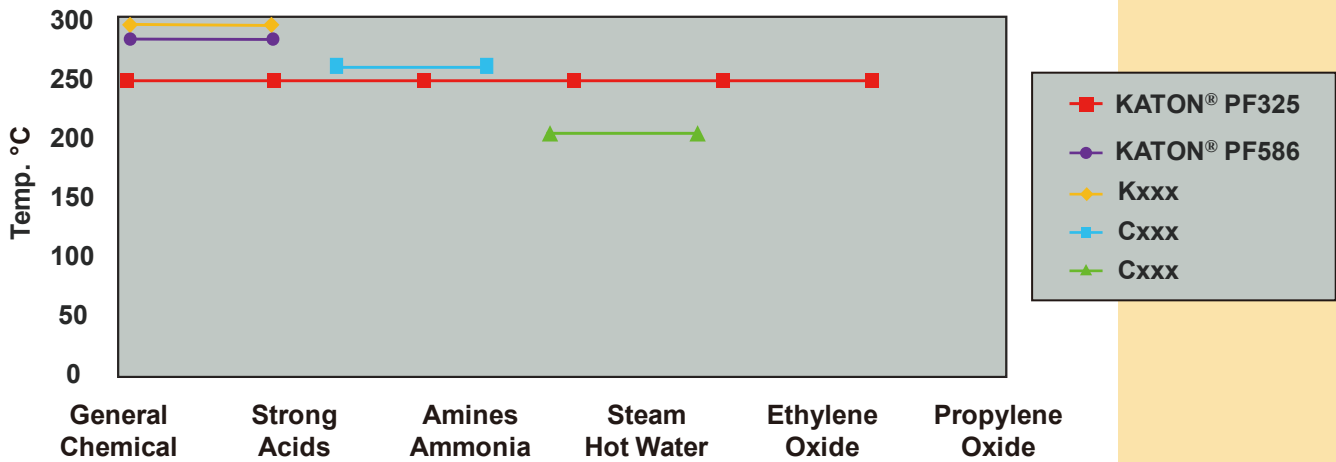

## PF586 compare with other compound --- Chemical resistance


Media	Temp (C)	Duration (Hrs)	PF586	Cxxx
Formaldehyde	65	168	A	A
Butyraldehyde	50	168	A	B
Tetrachloroethylene	Ambient	168	A	A
Carbontetrachloride	Ambient	168	A	A
Hydrofluoric Acid (48%)	Ambient	168	A	A
Triethanolamine	40	168	A	A
Ethylenediamine	90	70	B	B
Ethylene Oxide	Ambient	70	A	A
Hydrogen Sulphide	40	168	A	A
Hot water	160	168	A	A
Steam	160	168	A	A
Toluene	100	168	A	A

## PF586 compare with other compound --- Temperature comparison

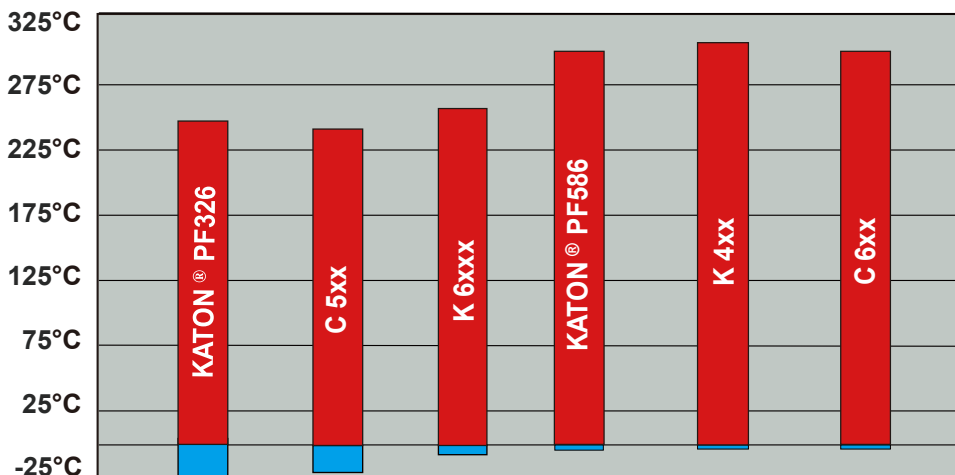

## TGA analysis compare with other compound

Search result for : PF80180-051107  
 Date : Mon Nov.07 10:08 : 13 2016 (GMT+08:00)  
 Search algorithm : Correlation  
 Regions searched : 3999.84-649.93

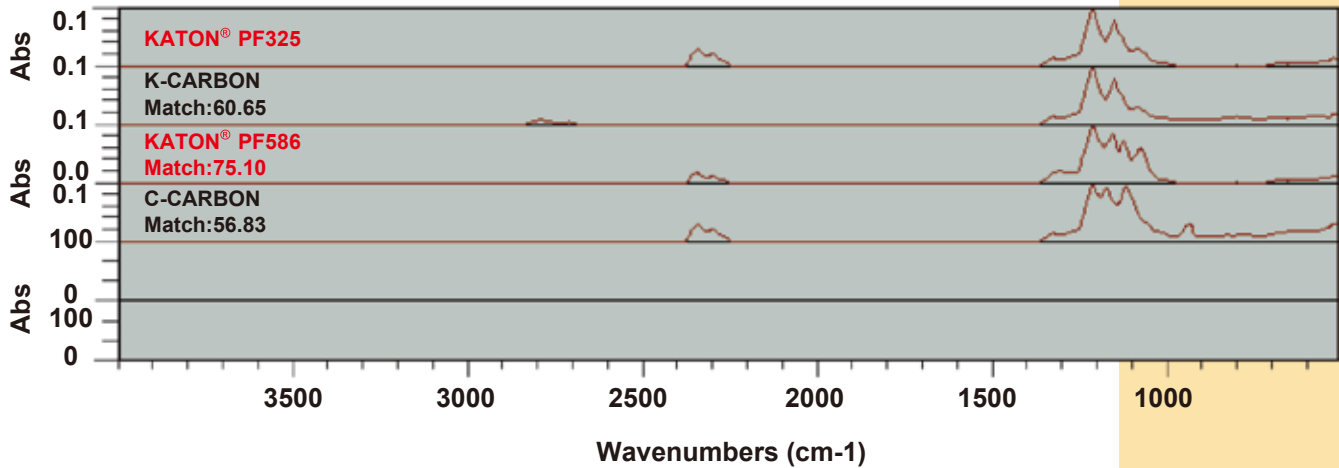

### Search result list of matches

	index	Mctch	Compourid Name	Library Name
1	2	80.65	K-CARBON	QC
2	3	75.10	KATON® PF586	QC
3	1	56.83	C-CARBON	QC



### Maxmold Polymer Co., LTD

ADD No. 18, Ln. 434, Sec. 4, Zhonghua Rd., Xiangshan Dist., Hsinchu City 30094, Taiwan  
 TEL 886-3-538-0817  
 FAX 886-3-538-0827  
 E-mail [service@maxmold.com](mailto:service@maxmold.com)  
 Web [www.maxmold.com](http://www.maxmold.com)

Material Safety Data Sheets (MSDS) are available by emailing us or contacting your sales representative. Always consult the appropriate MSDS before using any of our products. Neither Maxmold® Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Maxmold's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Maxmold's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Maxmold® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Maxmold® Group or their respective owners.

© 2021 Maxmold Specialty Polymers. All rights reserved.